
Metal Shed

OWNER'S MANUAL / Instructions for Assembly Archer M-B



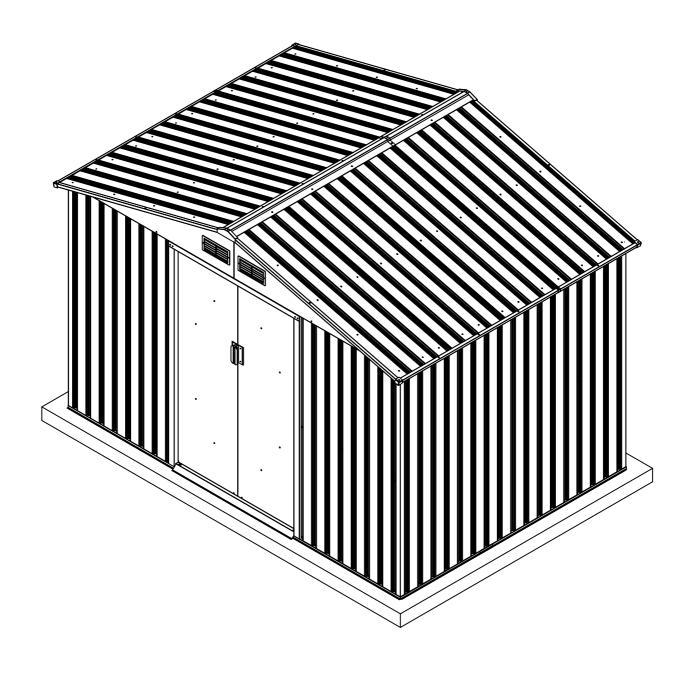

Assembly Preparation

Owner's Manual

Please check local building codes regarding footings, location and other requirements before beginning construction.

Assembly instructions:

Reviewing all instructions and the appropriate information before you begin, make sure following the step sequence carefully for successful results.

Flooring base:

A good location for the storage building is a square and level area with good drainage. The base is not included in the kit which may need purchase separately or may construct a foundation and anchoring system of your own. The foundation base should be 10 cm larger than the base rail of the shed (minimum 10cm thickness concrete slab is recommended).


A strong plastic sheet (thickness: at least $150\mu m$) should be placed under the foundation to assist in reducing rising dampness from the soil, thus reducing condensation build up in the shed. Your storage building must be anchored to prevent wind damage. Once secured, it is highly recommended applying silicone along the inside of the base rail to minimize condensation.

Parts and Parts List:

Before you start, check to be sure that you have all the necessary parts for your building (refer to the Parts List Page). Do not attempt to assemble the building if parts are missing because any building left partially assembled may be seriously damaged by light winds.

Please tear off the safety protection layer before assembly, keep the part number label if needed.

Tools you need:




Safety must be put in the No. 1 position:

- 1. Select a dry and calm day for your assembly. Team works (Two or more people) are required during the assembly. It is also recommended to finish the assembly in a day to avoid damage to the product or missing of some small parts. Keep all small parts (screws etc.) in a bowl so they do not get lost.
- 2. Wearing safety gloves, eye protection and long sleeves during the assembly to prevent injury. Pay attention to the sharp edge of some parts.
- 3. Children and pets are not allowed entering into the construction site.
- 4. Never concentrate your total weight on the roof of the building. When using a step ladder make sure that it is safe.


Care & Maintenance:


- 1. Keep the shed clean with soft cloth, use water if necessary.
- 2. Keep the door tracks clear of dirt and other stuff that prevent them from sliding easily.
- 3. Clean the snow with necessary tools to make sure it is safe to enter into.
- 4. The shed is not made for living but storing stuff.
- 5. Please add some oil on the top and bottom door sliding channel to make door slides smoothly.

Size of Archer M-B:

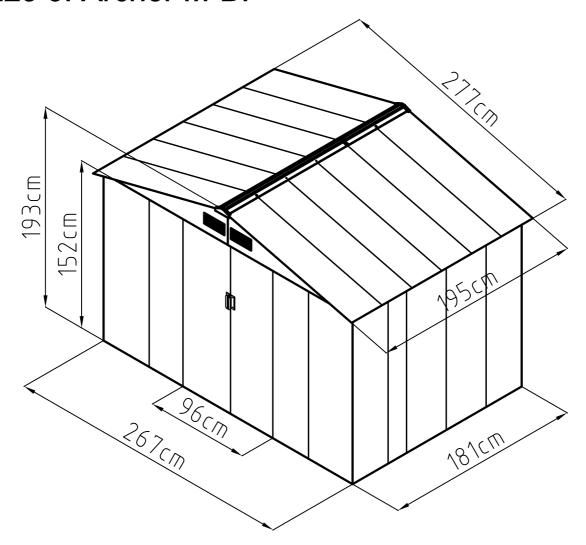

Area of installation requirement:

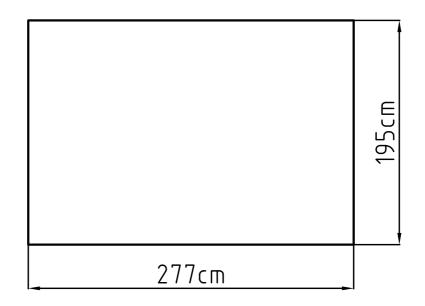

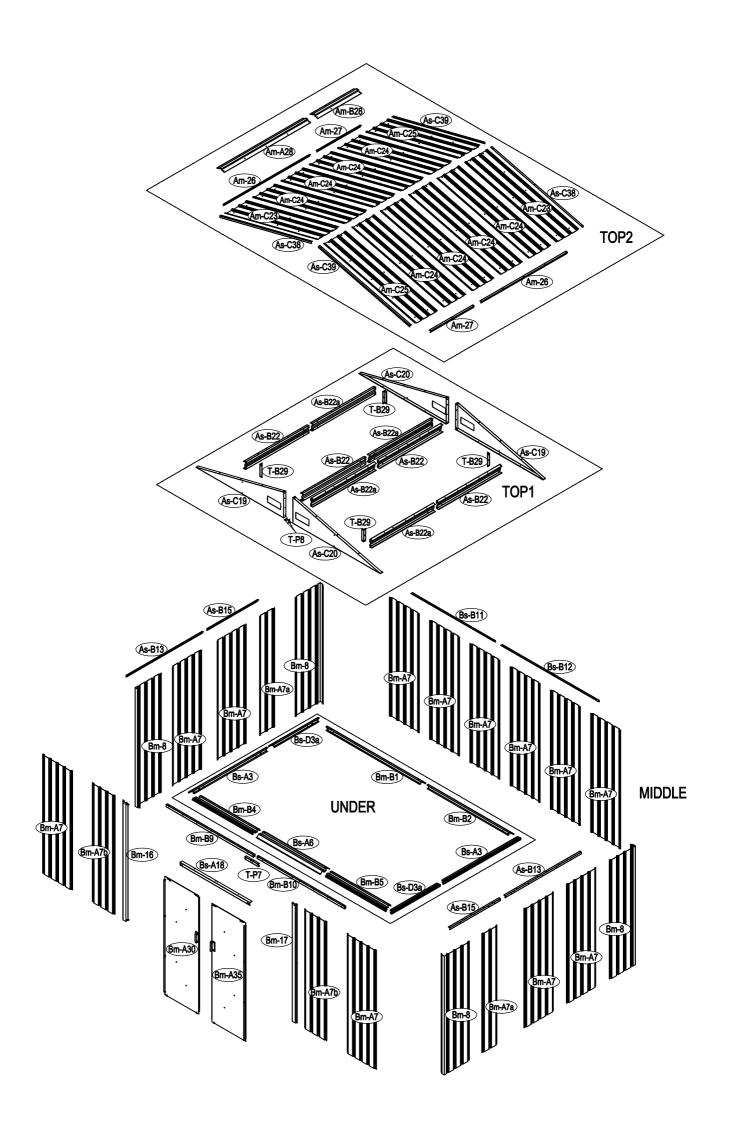

NO.	IMAGE	mm	QTY		NO.	IMAGE	mm	QTY
UNDER					As-C39		1417	x2
Bm-B1	, ^1_	1480	x1		Am-A28	<u></u>	1298	x1
Bm-B2		1287	x1		Am-B28		659	х1
Bs-A3		1174	x2	DOOR				
Bs-D3a		742	x2		Bm-A30		1543	x1
Bm-B4	71. 7	909.5	x 1		Bm-A35	[<u>· · · ·</u>]	1543	x1
Bm-B5		909.5	x 1		Bm-31		1483	x2
Bs-A6	5	958	x1		Bm-A32		876	х4
MIDDLE					Bs-A33		486	x1
Bm-A7	~~~~~	1548	x12		Bs-A34	_	486	x1
Bm-A7a	~	1548	x2		Bs-A36		486	х1
Bm-A7b	~~	1548	x2		Bs-A37		486	x1
Bm-8		1548	х4		ANNEX			
Bm-B9	<u> </u>	1315	x1		T-P1	Ø		х4
Bm-B10		1315	x 1		T-P2			х4
Bs-B11	٦	1249	x1		T-P3	Ø		х4
Bs-B12		1453	x 1		T-P4	Ø		x2
As-B13	٦	1145	x2		TP5A			x4
As-B15		762	x2		T-P6	Û		x2
Bm-16	Ż	1548	x1		T-P7		200	x 1
Bm-17		1548	x 1		T-P8	₽		x2
Bs-A18		1044	x1		Am-B40	0		x228
TOP1					Am-B41	OPP	ST4X10	x253
As-C19	<u>/</u> a	1305	x2		Am-B42	O ₀₀	ST4X16	x20
As-C20		1305	x2		Am-B43	Contract of the Contract of th	M4X10	x99
As-B22	3	954.5	х4		Am-B44	8		x133
As-B22a		954.5	х4					_
T-B29	Ø	160	х4					
TOP2								
Am-C23		1420	x2					
Am-C24		1420	x8					
Am-C25		1420	x2			_		
Am-26	٦	1294	x2					
Am-27		655	x2					
As-C38		1417	x2					

