
Metal Shed

OWNER'S MANUAL / Instructions for Assembly Archer M-A



Requires two people and takes 2-3 hours for Installation.

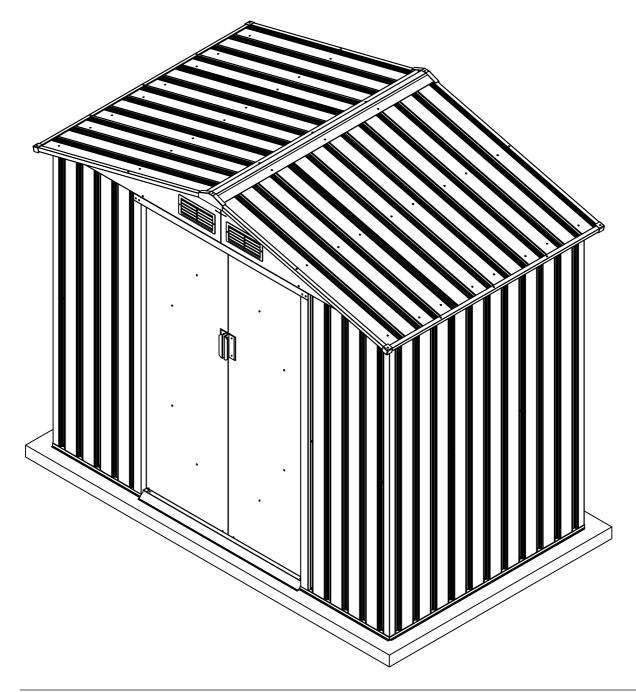

Assembly Preparation

Owner's Manual

Please check local building codes regarding footings, location and other requirements before beginning construction.

Assembly instructions:

Reviewing all instructions and the appropriate information before you begin, make sure following the step sequence carefully for successful results.

Flooring base:

A good location for the storage building is a square and level area with good drainage. The base is not included in the kit which may need purchase separately or may construct a foundation and anchoring system of your own. The foundation base should be 10 cm larger than the base rail of the shed (minimum 10cm thickness concrete slab is recommended).


A strong plastic sheet (thickness: at least 150μ m) should be placed under the foundation to assist in reducing rising dampness from the soil, thus reducing condensation build up in the shed. Your storage building must be anchored to prevent wind damage. Once secured, it is highly recommended applying silicone along the inside of the base rail to minimize condensation.

Parts and Parts List:

Before you start, check to be sure that you have all the necessary parts for your building (refer to the Parts List Page). Do not attempt to assemble the building if parts are missing because any building left partially assembled may be seriously damaged by light winds.

Please tear off the safety protection layer before assembly, keep the part number label if needed.

Tools you need:

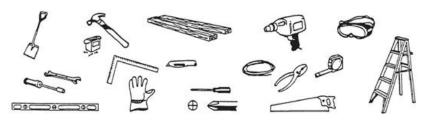


Safety must be put in the No. 1 position:

- 1. Select a dry and calm day for your assembly. Team works (Two or more people) are required during the assembly. It is also recommended to finish the assembly in a day to avoid damage to the product or missing of some small parts. Keep all small parts (screws etc.) in a bowl so they do not get lost.
- 2. Wearing safety gloves, eye protection and long sleeves during the assembly to prevent injury. Pay attention to the sharp edge of some parts.
- 3. Children and pets are not allowed entering into the construction site.
- 4. Never concentrate your total weight on the roof of the building. When using a step ladder make sure that it is safe.


Care & Maintenance:


- 1. Keep the shed clean with soft cloth, use water if necessary.
- 2. Keep the door tracks clear of dirt and other stuff that prevent them from sliding easily.
- 3. Clean the snow with necessary tools to make sure it is safe to enter into.
- 4. The shed is not made for living but storing stuff.
- 5. Please add some oil on the top and bottom door sliding channel to make door slides smoothly.

Size of Archer M-A:

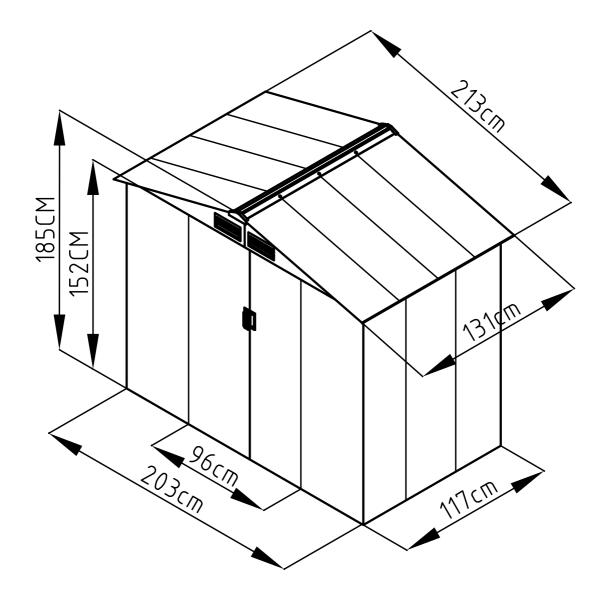

Area of installation requirement:



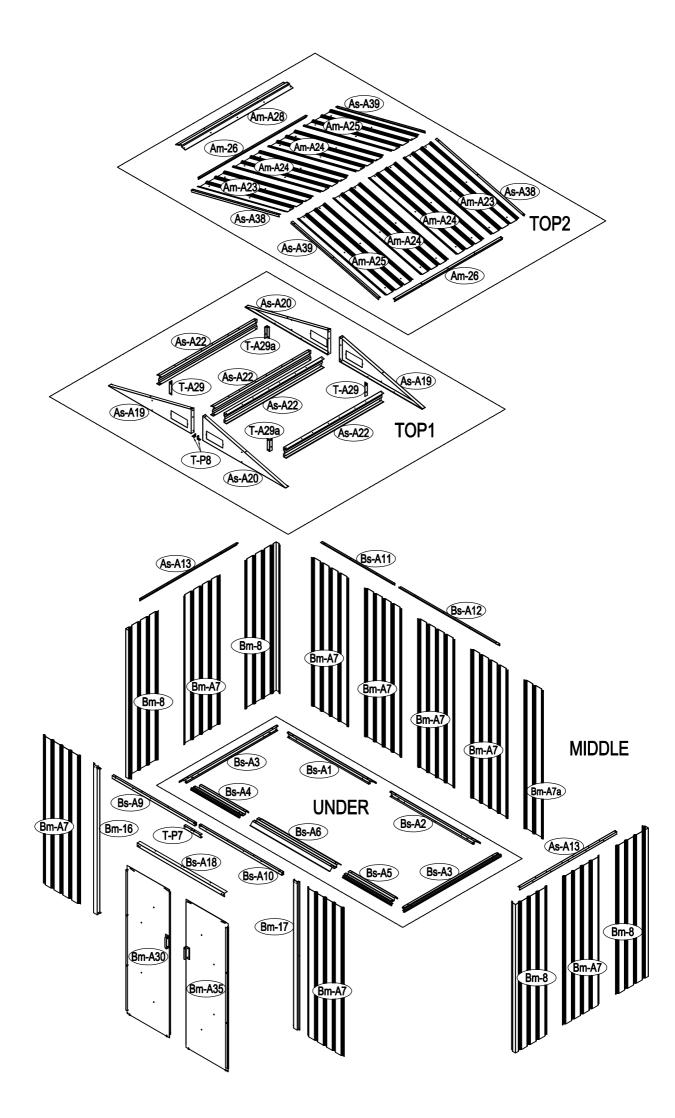

NO.	IMAGE	mm	QTY	Γ	NO.	IMAGE	mm	QTY
UNDER				1	Bm-A35	[····]	1543	x1
Bs-A1	·	1055	x1		Bm-31		1483	x2
Bs-A2		1074	x1	1	Bm-A32		876	x4
Bs-A3		1174	x2	1	Bs-A33		486	x1
Bs-A4		590	x1		Bs-A34		486	x1
Bs-A5		590	x1]	Bs-A36		486	x1
Bs-A6	\sim	958	x1]	Bs-A37		486	x1
MIDDLE					ANNEX			
Bm-A7		1548	x8]	T-P1	B		x4
Bm-A7a	~	1548	x1		T-P2			x4
Bm-8		1548	x4]	T-P3	\bigotimes		x4
Bs-A9	5	995	x1]	T-P4	Ø		x2
Bs-A10		995	x1]	TP5A			x4
Bs-A11	5	873	x1]	T-P6			x2
Bs-A12		1190	x1		T-P7	ll l	200	x1
As-A13	٦	1168	x2]	T-P8	B		x2
Bm-16	7	1548	x1]	Am-A40	0		x154
Bm-17		1548	x1]	Am-A41	() ^{an}	ST4X10	x180
Bs-A18	7	1044	x1]	Am-A42	() ^{an}	ST4X16	x16
TOP1]	Am-A43	Can B	M4X10	x70
As-A19		989.3	x2		Am-A44	6		x96
As-A20		989.3	x2					
As-A22	}	1174	x4]				
T-A29	Ū	120	x2			τ.		
T-A29a		120	x2]				
TOP2]				
Am-A23		1090	x2					
Am-A24		1090	x4]				
Am-A25		1090	x2					
Am-26	٦	1294	x2]				
As-A38		1087	x2]		-		
As-A39		1087	x2					
Am-A28		1298	x1					
DOOR]				
Bm-A30	[····]	1543	x1					

